


Mobile compact screen

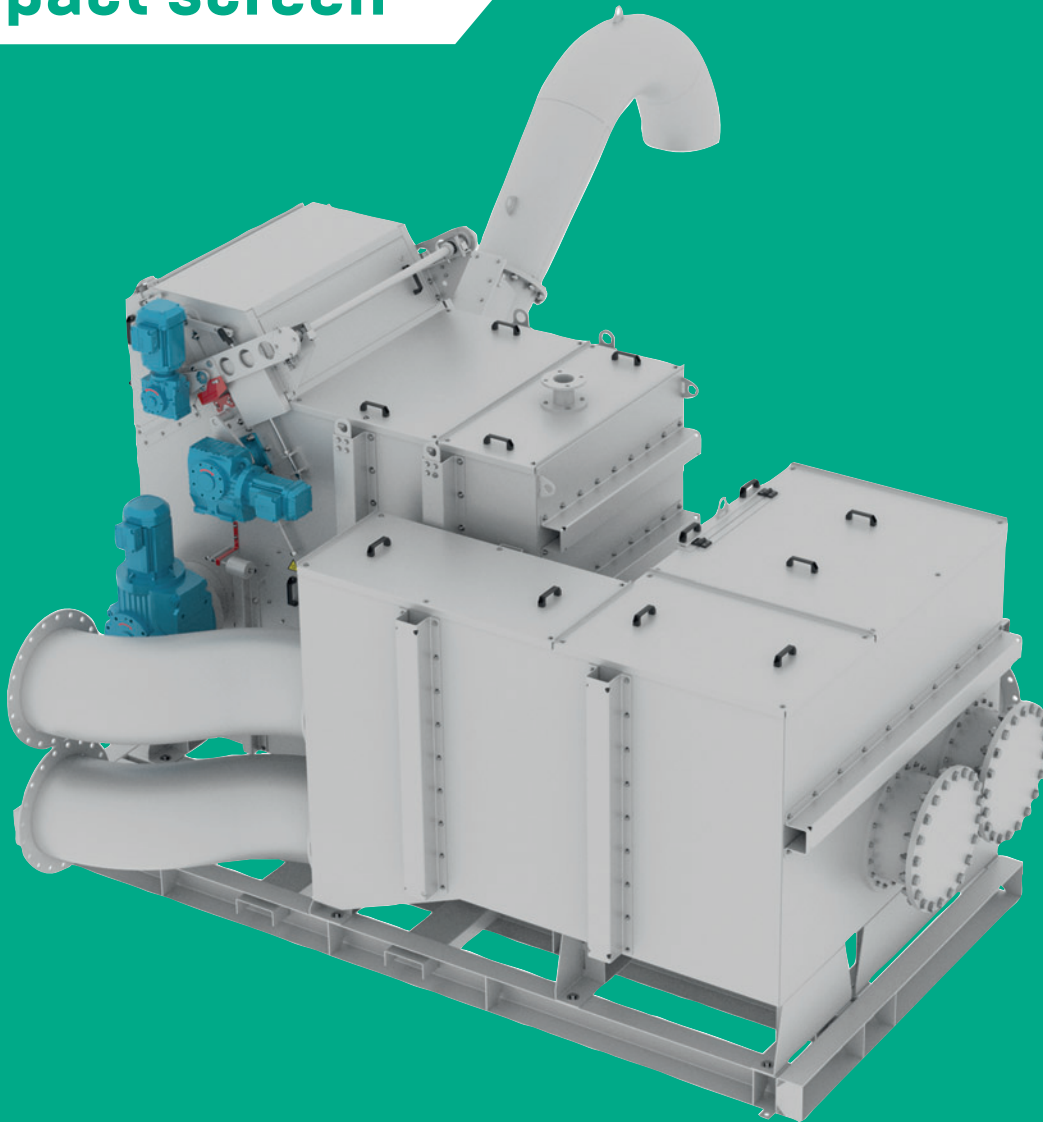

Specialized in environment
Technology **since 1970**

Mobile compact screen from FSM Frankenberger

The new, mobile compact screen from FSM Frankenberger with a capacity of up to 400 l/s makes it possible to channel the wastewater produced during conversion work or inspections via a mobile screen. This means that this work can be carried out without having to consider operational requirements. But without compromising on screening performance.

Your advantages when using a rental screen von FSM Frankenberger

- Filter screen and perforated plate screen 6 mm, from FSM Frankenberger
 - **Highest screening performance**
- Integrated screenings washing press
 - **Washing out the organics and highest dry substance values**
- Extremely compact design with integrated emergency circulation
 - **Screen can be easily placed during conversion work**
- Full automation with automatic control and various interfaces for integration into the control system of the plant

Technical data

- Capacity: up to 400 l/s
- LWH in mm: 4,100/2,450 (with discharge tube 5,615)/2,810
- Weight: 4,250 kg empty, 8,650 kg full
- Connections: DN 600
- Screen: Filter screen, perforated plate screen 6 mm, width 1,000 mm, 60° angle, high-flow design
- Screenings washing press: SPW 300 with 1,300 mm feed hopper and a capacity of up to 5 m³/h
- Emergency bypass in separate container with coarse screen 50 mm
- Material version complete incl. frame INOX V2A

